



Foundation Engineering

Technologies to Improve
Soils and Foundations



Contents

03 _ Foundation Engineering and Ground Improvement
04 _ Grouting Solutions
05 _ Our Products in Detail
06 _ Ground Reinforcement: Anchors and Nailing
08 _ Deep Soil Mixing/Jet Grouting

10 _ Innovative Concrete Admixtures
for Deep Foundation Construction
12 _ MasterMatrix® FC 500 for Reliable Water Retention
13 _ Know-how and Service
14 _ Master Builders Solutions®



Foundation Engineering and Ground Improvement

When designing underground structures such as foundations, embankments, excavations or slopes, the foundation soil may be unable to withstand the loads transmitted by the structures, leading to problems such as high settlements, poor bearing capacity and high water permeability. Such issues are particularly likely to occur where there are earthquakes, landslides, rainy events or climate changes.

Ground improvement entails a range of techniques (both mechanical and chemical) to improve the density, permeability, deformability, and the shear resistance of the soil in order to prevent or reduce the undesired effects.

Many recent technological developments have made ground improvement more efficient and cost effective. Techniques such as injection, soil deep-mixing, jet grouting, anchoring and bored piles are some of the most widely used mechanical soil improvement technologies.

Injections, deep-mixing and jet grouting involve injecting a binder (conventional or chemical) or mixing it at a certain pressure and depth to form a hardened solid material.

For foundation engineering, anchors can be used as support structures which can be mechanically coupled with the soils (in a passive or active manner) via a binder to resist movement of the retaining structure.

Bored (or drilled) piles are installed by drilling a cylindrical hole to the required depth and subsequently filling it with concrete. They are needed when the top layers of the soil are highly compressible, when soils are expansive and collapsible or when the structure is subjected to strong uplift forces.

Through years of research and development, Master Builders Solutions® has created a range of additives aimed to improve the deployment and longevity of these various foundation engineering and ground improvement techniques.

Added Value:

- Permeation and strengthening of very fine soils (i.e. k-values of 10^{-6} m/sec)
- Improvement of deep soil mixing in clayey soils
- Improvement of hydrodynamic performance of jet grouting
- Robust materials for ground anchors
- Improvement of water retention for concrete in bored piles
- Grouts with low CO₂ impact



Grouting Solutions

The MasterRoc® product line from Master Builders Solutions® offers market-leading innovations for foundation engineering and ground improvement. Our reliable, customer-focused solutions include a variety of compelling technologies for efficient and cost effective construction.

Performance Characteristics	MasterRoc® MP 355 series	MasterRoc® MP 358 series	MasterRoc® MP 300 Series	MasterRoc® MP 309	MasterRoc® MP 320 series	MasterRoc® Microfine and ultrafine cements
Product Category	Single-component Polyurethane	Two-component Polyurethane	Acrylics	Acrylics	Colloidal Silica	Microfine Cement
Main Application	Ground stabilization (coarse sand and gravel), Water migration prevention	Strata consolidation	Water migration prevention, Pre-excavation ground consolidation	Ground stabilization (silty and sandy soils), Pre-excavation ground consolidation	Ground stabilization (silty and sandy soils), Pre-excavation ground consolidation	Ground stabilization, Water migration prevention
Ground Excavation Characteristics	Yes	Yes	No	Yes	Yes	Yes
Mixing Ratio	Accelerator at up to 10% of resin by volume	1:1 by volume	Various with accelerator, hardener, and water	Various with accelerator, hardener, and water	Accelerator at 10% by volume	Water cement ratio 0.5 - 1.0
Particle Size (µm)	N/A	140	N/A	N/A	0.004 - 0.016	D95 of 12 - 20
Viscosity (cP or mPa.s)	320	Part A: 300 / Part B: 300 (estimated viscosity of the mixed material is 300, right after mixing)	2 to 13	13	10	N/A (dry powder)
Reaction Time / Setting Time / Gel Time	10 sec to 5 min	30 sec to 80 s	10 sec to 9 min	1 to 9 min	10 min to 2 hr	2 hr to 2.5 hr
Cured Material Appearance	Rigid foam	Rigid material	Flexible soft gel	Hard-elastic solid	N/A	Rigid material
Adhesive / Bond Strength	Excellent	Excellent	Excellent	Good	N/A	N/A
Strength	Low to medium	Flexural: 870 psi (6 MPa)	Compressive - over 1300 psi (9 MPa)	Compressive - over 1300 psi (9 MPa)	About 0.5 MPa at 28 days (UCS)	Above 10 MPa at 28 days (UCS)
Chemical Resistance	N/A	N/A	Acids and bases	Acids, bases, solvents and fuels	N/A	N/A
Pot Life after Activation	N/A	N/A	8 hr	5 hr	N/A	0.5 hr
Pump Required	Single-component injection pump	Two-component injection pump with a static in-line mixer	Two-component injection pump	Two-component injection pump	Single or two-component injection pump	Colloidal mixer
Additional Notes	Mixed product requires moisture/water to activate	Less water sensitive	Resin can be split with water (up to 1:3)	N/A	N/A	N/A



Our Products in Detail

		Low to Medium Water Ingress	High Water Ingress	Permeation Grouting	Pre-injection Grouting	Small Void Fill	Strata Consolidation	Cavity Filling	Rock Bolt Anchor Resin	Cable Bolt Anchor Resin
Acrylic Resins										
MasterRoc® MP 300	Low viscosity, very flexible gel with adjustable water to resin ratios 1:1 to 3:1	●		●	●		●			
MasterRoc® MP 304	Low viscosity, very flexible	●								
MasterRoc® MP 307 CE	Low viscosity, adjustable setting time, rubber-like	●								
MasterRoc® MP 309	Low viscosity, high compressive strength			●	●		●			
Hydrophobic One-Component Polyurethane										
MasterRoc® MP 355 1K	High expansion, semi-rigid foam, used with MasterRoc® MP 355 1K accelerator	●		●		●				
MasterRoc® MP 355 1K DW	High expansion, flexible foam, used with MasterRoc® MP 355 1K accelerator	●				●				
Two-Component Polyurethane										
MasterRoc® MP 355	Fast reaction time, dense cured material	●					●			
MasterRoc® MP 355 w/ Accel 10	Dense, high foam expansion factor, rapid reaction	●	●			●	●			
MasterRoc® MP 355 w/ Accel 25	Strong foam, low foam expansion factor	●	●							
MasterRoc® MP 358 SC	Dense, foam expansion factor 3, rapid strength gain	●				●	●			
Two-Component Polyurea Silicate										
MasterRoc® MP 368	Rapid strength development, high density resin, not water-sensitive						●			
MasterRoc® MP 368 TIX	Thixotropic behavior, not water-sensitive	●					●			
MasterRoc® MP 367	High Foam Expansion Factor, fast reaction, not water-sensitive					●	●	●		
Microfine/Ultrafine Cement										
MasterRoc® MP 650	Microfine cement - 2 h set time			●	●	●				
MasterRoc® MP 800	Ultrafine cement - 2 h set time			●	●	●				
MasterRoc® MP 900	Ultrafine cement - 2 h set time			●	●	●				
Colloidal Silica										
MasterRoc® MP 320/325	Ultra low viscosity, one-component resin			●	●	●				
Rock Bolting										
MasterRoc® RBA 380	Two-component thixotropic resin, rapid strength								●	●
MasterRoc® RBA 387	Extremely fast-reacting thixotropic resin, rapid strength gain, suitable for cold weather applications								●	●
Chemical Grouting Accessories										
MasterRoc® MP 230 CLN	Pump cleaner, equipment preservation agent									
MasterRoc® MP 304 Part B	Optional component used with acrylic resins (MasterRoc® MP 300, MP 304 and MP 307 CE) for increased bond and decreased shrinkage in wet and dry cycling									
MasterRoc® FLC 100	Powdered rheoplastic additive for nonshrink cement grout									
MasterRoc® EQ 512 PK	Mechanical packer for high pressure chemical grout, 1/2 in. (13 mm) diameter									
MasterRoc® EQ 558 PK	Mechanical packer for high pressure chemical grout, 5/8 in. (16 mm) diameter									
MasterRoc® EQ 250 OR	Oakum rope, 2 in. (50 mm) diameter									

This guide shows the relative performance and properties of MasterRoc® injection products. Depending on the jobsite conditions, the performance obtained may be different from the performance shown in this guide. Contact your local sales representative for additional information on the performance of Master Builders Solutions® MasterRoc® line of products.



Ground Reinforcement: Anchors and Nailing

Anchors and nails are tensile elements commonly used in civil engineering projects to resist lateral, uplift or pullout forces or to generate confining pressure.

They are structural elements used to anchor retaining walls, bulkheads and structures in general to the ground and to support excavation fronts. They are also used in the stabilization and consolidation of slopes subject to landslides and for rock walls. An anchor consists of a suitably designed reinforcing element (with strands, bars or pipes), inserted into a special hole in the ground. The element intersects the plane where slipping could occur, anchoring itself to the mass of stable ground. The anchor is connected to the soil with a binder.



Anchors can operate as follows:

- a) passive – they are pre-tensioned
- b) active – are tensioned by a design force

In the first case, the action of the anchor is triggered by its deformation, induced by the displacement of the ground.

In the second case, however, the anchor is already active before further displacements of the surrounding ground, which only increase the stress on it.

The main components for passive anchors (above) and active anchors (below):

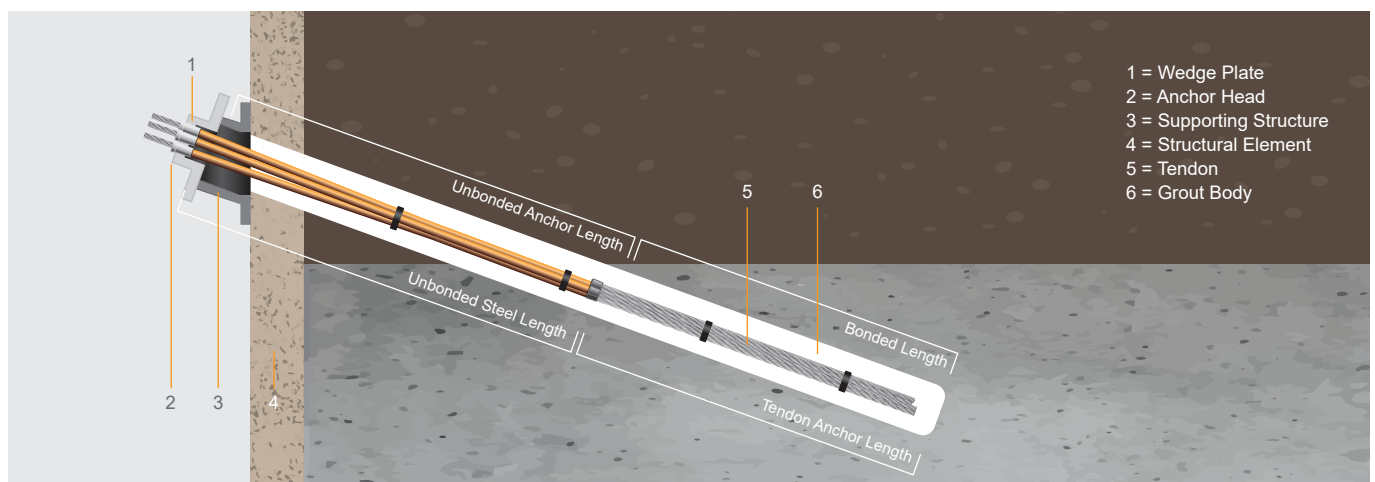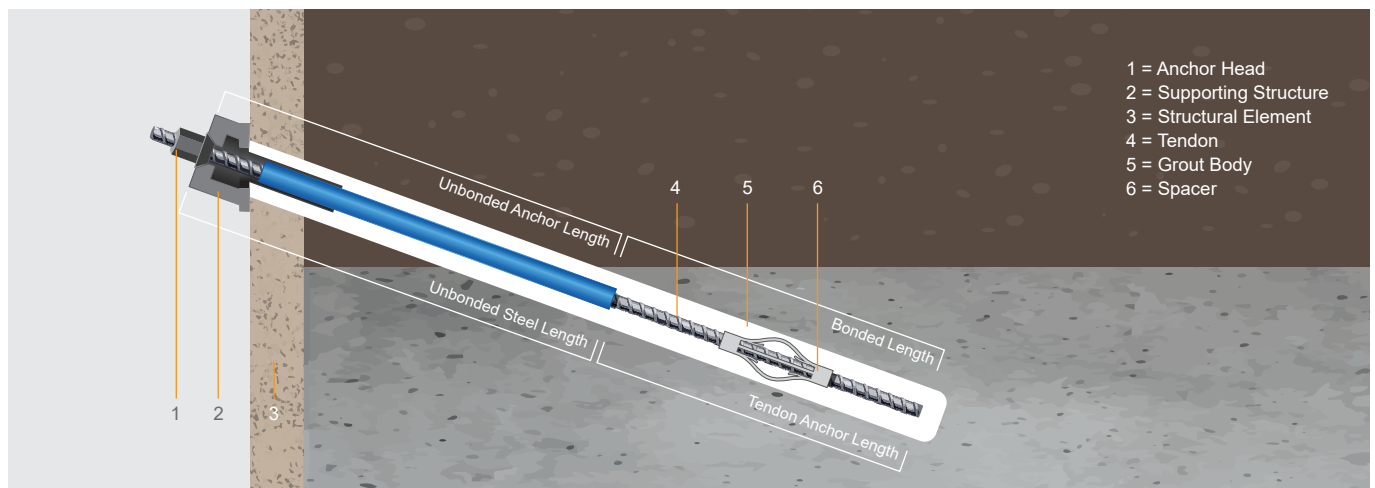

Typical fields of application are:

- Rock and slope stabilization
- Intra-urban construction
- Tiebacks for sheetpiles, slurry walls and similar temporary excavation support systems
- Excavations (deformation resistant)
- Uplift control in hydraulic structures (dams, weirs and spillways)
- To prevent flotation of underwater structures
- To prevent heave due to swelling soils

The tensile elements are inserted in the ground, connected to a structure and bonded to soil or rock in order to resist uplift or pull-out forces.

Typically, soil reinforcement involves stress transfer all along the reinforcing elements. However, soil and rock anchors transfer an uplift or pull-out force via a bar or cable in a good bearing stratum.

The tensile elements may be classified according to stress transfer, function or performance criteria:

- Bearing-type or friction anchors
- Prestressed (active support) where the working load generates a small variation in the tendon force, or unstressed (passive support) where considerable changes are expected under working load;
- Temporary or permanent anchors

Tests used to evaluate performance can measure the following parameters:

- Creep under constant load or stress relaxation at constant deformation
- Deformation upon reloading
- Load transfer to the ground
- Permanent deformation remaining after anchor test

The performance of ground reinforcement depends on several factors. Master Builders Solutions® provides a full range of grouting products to provide high performance ground anchors, with specialized solutions for vibration damping, underwater construction and high strength applications. Our formulations include high performance properties such as early strength, extended working life at high temperatures, shrinkage compensation, corrosion protection and predictable performance.

MasterRoc® FLC 100 is the industry standard for anchors and post tensioned cable grouting. It is a chloride-free admixture in powder form which is added to cement to produce a pumpable, non-shrink, non-segregating, impermeable grout, providing high strength and a high bond to steel. It protects cables against corrosion from aggressive agents and stress.

MasterRoc® TIX series is a shrinkage compensated cementitious grout for the encapsulation of fully-bonded rock dowels in both underground and above ground applications.



Deep Soil Mixing / Jet Grouting

Deep soil mixing

Deep soil mixing is a versatile in-situ ground improvement method which involves mechanically mixing the soil (including soft clays, silts and fine-grained sands) with a cementitious binder in order to increase the soil's mechanical properties. The tensile elements are inserted into the ground, connected to a structure and bonded to soil or rock to resist uplift or pull-out forces.

Jet grouting

Jet grouting is a ground improvement method whereby a high velocity jet (consisting of binders) is used to remould the soil structure and simultaneously mix cement grout with the in-situ soil.

Geotechnical challenges


The engineering properties of the stabilized soil do not only depend on the characteristics of the binder. It is possible to stabilize organic or clay-rich soils, but more difficult than stabilizing granular soils. Clayey soils normally require more cement and the unconfined compressive strength achieved is generally lower than the strength achieved in cohesionless soils.

Solutions for clayey soils:

The MasterRoc® GE 50 series are products which:

- Reduce the clogging and adhesion potential of clayey soils
- Improve the workability of the excavated clayey soil

The workability of a swelling clay is improved by adding varying amounts of MasterRoc® GE 50, expressed as a percentage of the dry weight of soils.

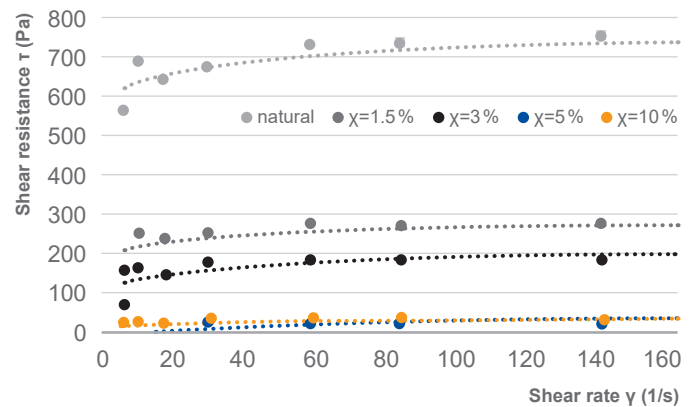

MasterRoc® GE 50 improves the homogeneity of the mixture. Adding 3% MasterRoc® GE 50 by dry weight to a clayey soil with a consistency of 50% creates a soil with a water/cement ratio of 0 with the same unconfined resistance as a clayey soil without MasterRoc® GE 50 which has a water-ratio of 1.

Improving the hydrodynamic efficiency of jet grouting

The evolution of hydrodynamic properties of the jet, and thus the cutting efficiency of jet grouting, can be expressed in terms of longitudinal and transverse velocity profiles. At the exit from the nozzle, streamlines are basically parallel and have an almost constant velocity. Thereafter, the velocity of threads progressively reduces due to the viscous-turbulent interaction of the jet with the surrounding fluid. Considering the velocity decay of a submerged jet in the diffusion zone along the longitudinal axis of the jet and in each transverse section, the parameter λ quantifies the interaction between the jet and the surrounding fluid. This parameter λ is the surviving fraction of the velocity at the nozzle. λ is linked (among others) to the dynamic viscosity coefficient of the grout.


MasterRoc® GE 15 is able to keep the parameter to a value where the hydrodynamic efficiency (and therefore the effectiveness of the jet stream) is high. MasterRoc® GE 15 has a different chemical structure from the traditional high

range water reducing. The alkalinity created by the cement allows the polymers of MasterRoc® GE 15 to “open up and progressively release” additional polymer chains that will prevent the early flocculation or stiffening of the mix. This mechanism allows to obtain, compared to traditional high-water reducing admixtures, considerably longer workability and reduction of mixing water content.

Strength enhancer

Master X-Seed® is a strength-enhancing admixture that improves strength development in cement while supporting sustainable construction. Compared to other setting accelerators, Master X-Seed® does not have a lasting effect on the rheology, even with highly flowable concrete mixes with extended workability. The strength-enhancing property of Master X-Seed® admixture allows the proportion of cementitious material in a grout to be reduced, while maintaining the same compressive strength development as the reference concrete. Using less cement reduces CO₂ emissions.

Appearance	Viscous liquid
Colour	Brown
pH	6.0 – 7.0
Specific gravity	1.10
Viscosity (cP)	< 130 cP
Chloride content	< 0.01 %

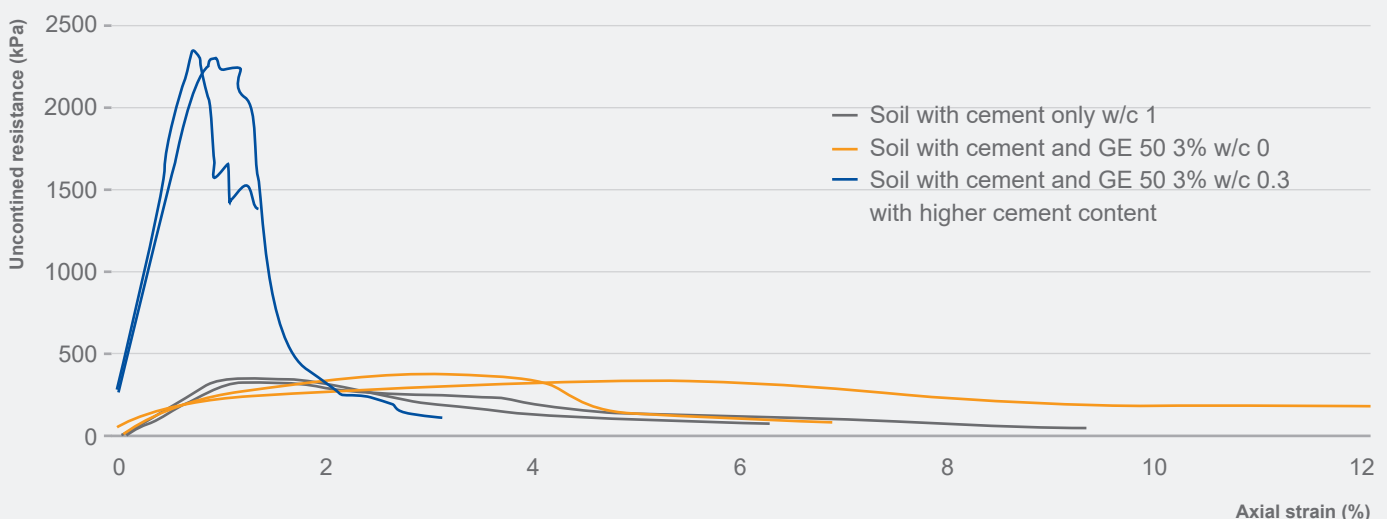




Innovative Concrete Admixtures for Deep Foundation Construction

The standard procedure in deep foundation construction is to use bored concrete piles or pile walls. In unstable ground conditions, or where the ground is prone to

subsidence, this serves to reliably distribute structural loads onto a suitable bearing stratum.

Concreting bored piles using the tremie method

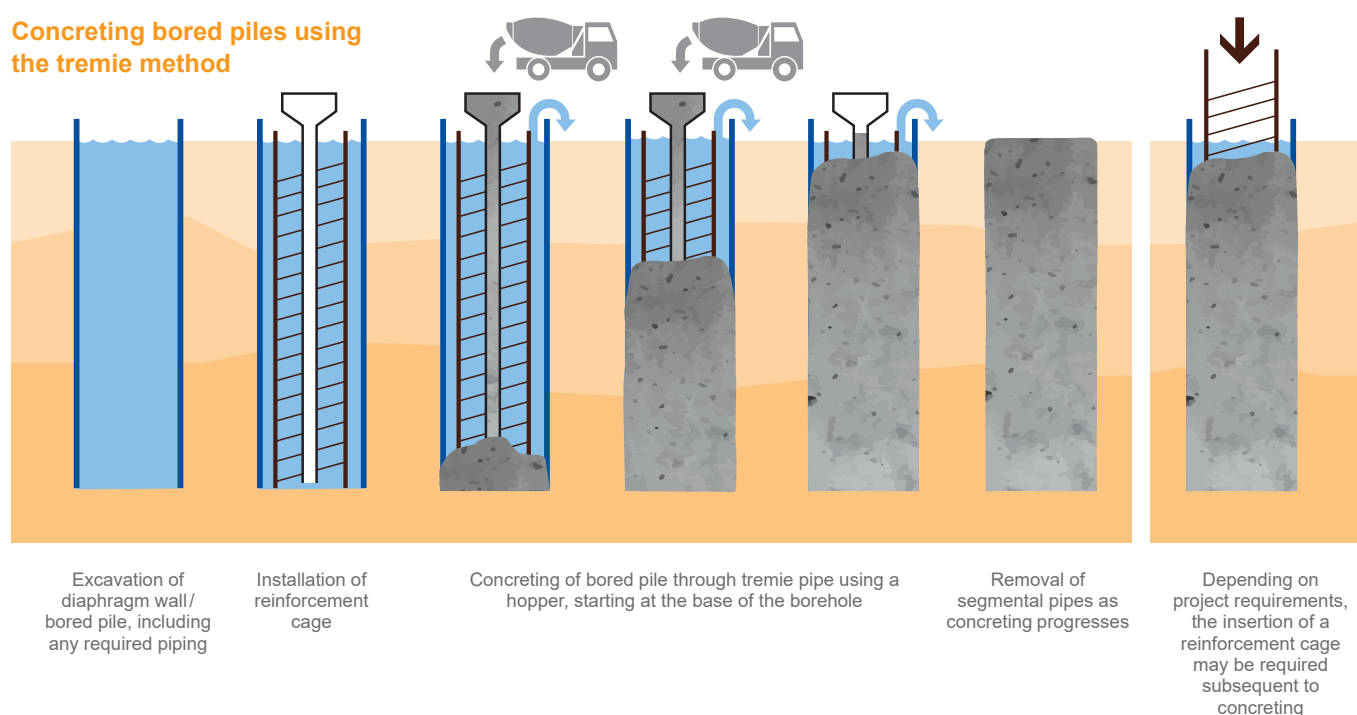

To ensure sufficient structural integrity and maximum durability of the foundation, the concrete used in the construction of bored piles has to meet a variety of flowability and stability requirements. The innovative concrete admixtures offered by Master Builders Solutions® are perfectly geared to such requirements.

The combined use of the latest generation of plasticizers (MasterSure® LDP) and stabilizers (MasterMatrix® FC 500) in deep-foundation construction enables groundbreaking synergy effects on the rheology and water retention of the concrete:

Benefits:



Extremely low concrete viscosity for easy pumping



Maximum flowability in self-compacting concretes



Robust, high-performance concrete



Highly extended workability time of 6 hours or more



Effective water retention






MasterMatrix® FC 500 for Reliable Water Retention

MasterMatrix® FC 500 is a novel stabilizer for use in deep foundation operations. High hydrostatic pressure during the concreting of bored piles (up to 70 m) can result in water being pressed out, resulting in lower

quality bored piles. MasterMatrix® FC 500 prevents this by combining maximum water retention with low viscosity and good temperature stability.

Water retention with MasterMatrix® FC 500

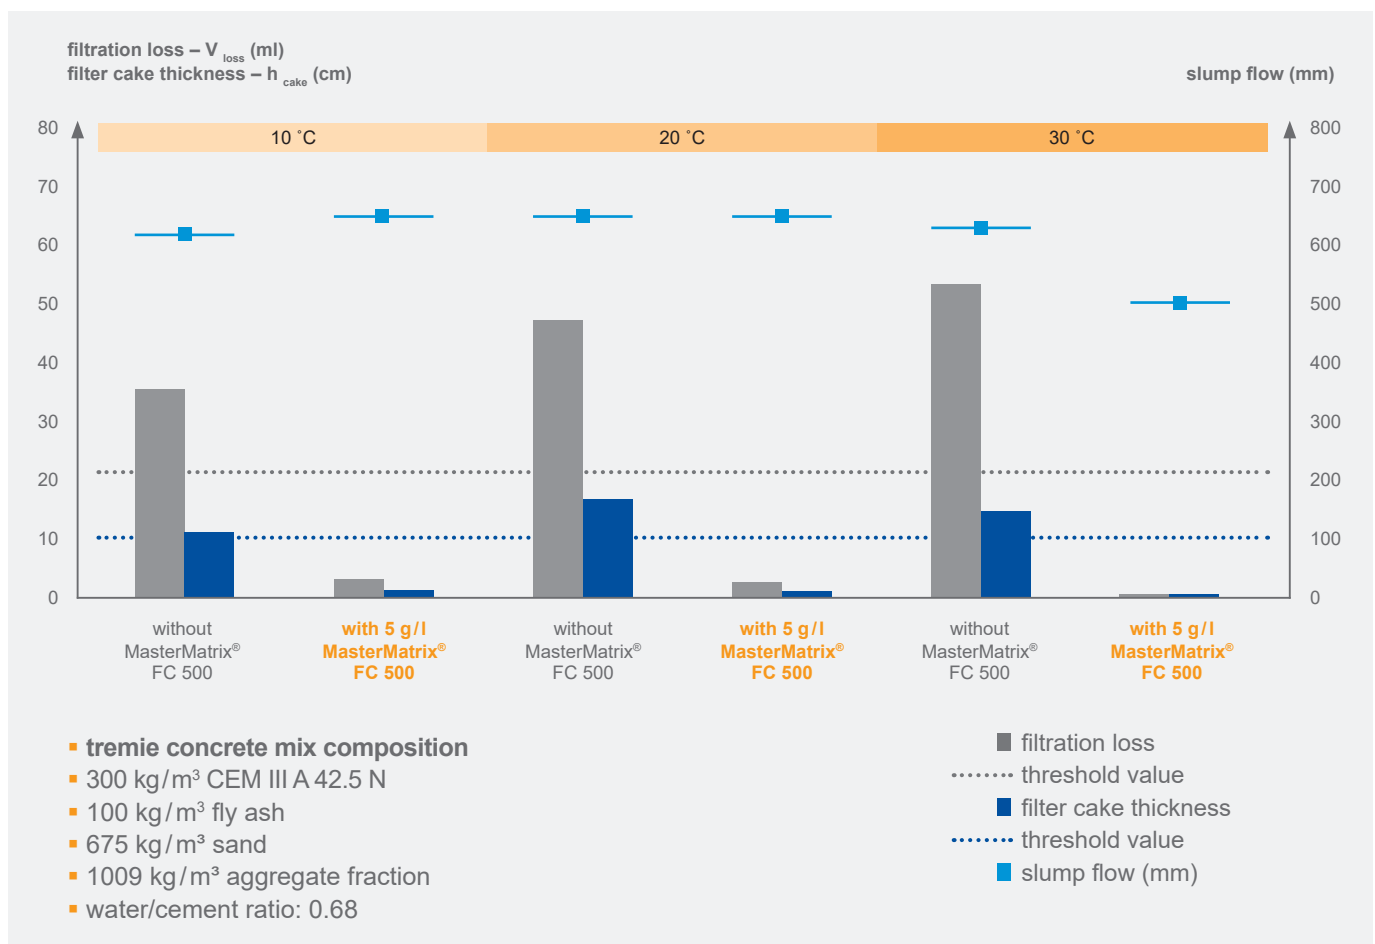

Benefits:

- Excellent water retention that reduces segregation and bleeding for an even load transfer
- Polymer network effectively counteracts absorbent or cohesive substrates
- Very good workability, irrespective of mixing intensity or head of pressure
- Optimum temperature stability to support changes in application conditions and deliver robust concrete properties



Know-how and Service



Training and education

Master Builders Solutions® brings extensive know-how gained through worldwide experience in solving challenging situations in tunneling and mining. In addition, support is offered frequently for clients, contractors and consultants by offering technical training courses and specialized seminars. Whenever required, and especially in the case of large projects, tailored on-site training can be organized.

Technical services

Master Builders Solutions® supplies more than just specialty products for underground construction and mining, assisting in the selection of the most suitable combination of products for each project specific geology, as well as providing start-up supervision and site support.

More brochures on our underground construction solutions are available at
<https://ugc.master-builders-solutions.com>

Documentation available on request:

- Reference list
- Project reports
- Technical data sheets
- Design guidelines
- Method statements




Master Builders Solutions®

Global Underground Construction Team

Master Builders Solutions®, with its global underground construction team, provides reliable, customer-oriented solutions focused on your needs in the tunneling and mining industries all over the world. We recognize that your success is underpinned by our ability to deliver solutions that meet or exceed your critical needs. By accompanying you from the start of your project and understanding the issues that are important to you, we can contribute to your success.

We support you with product training and quality control, and our professional technical services team is on hand around the clock, helping you with specialist technical advice and trouble shooting.

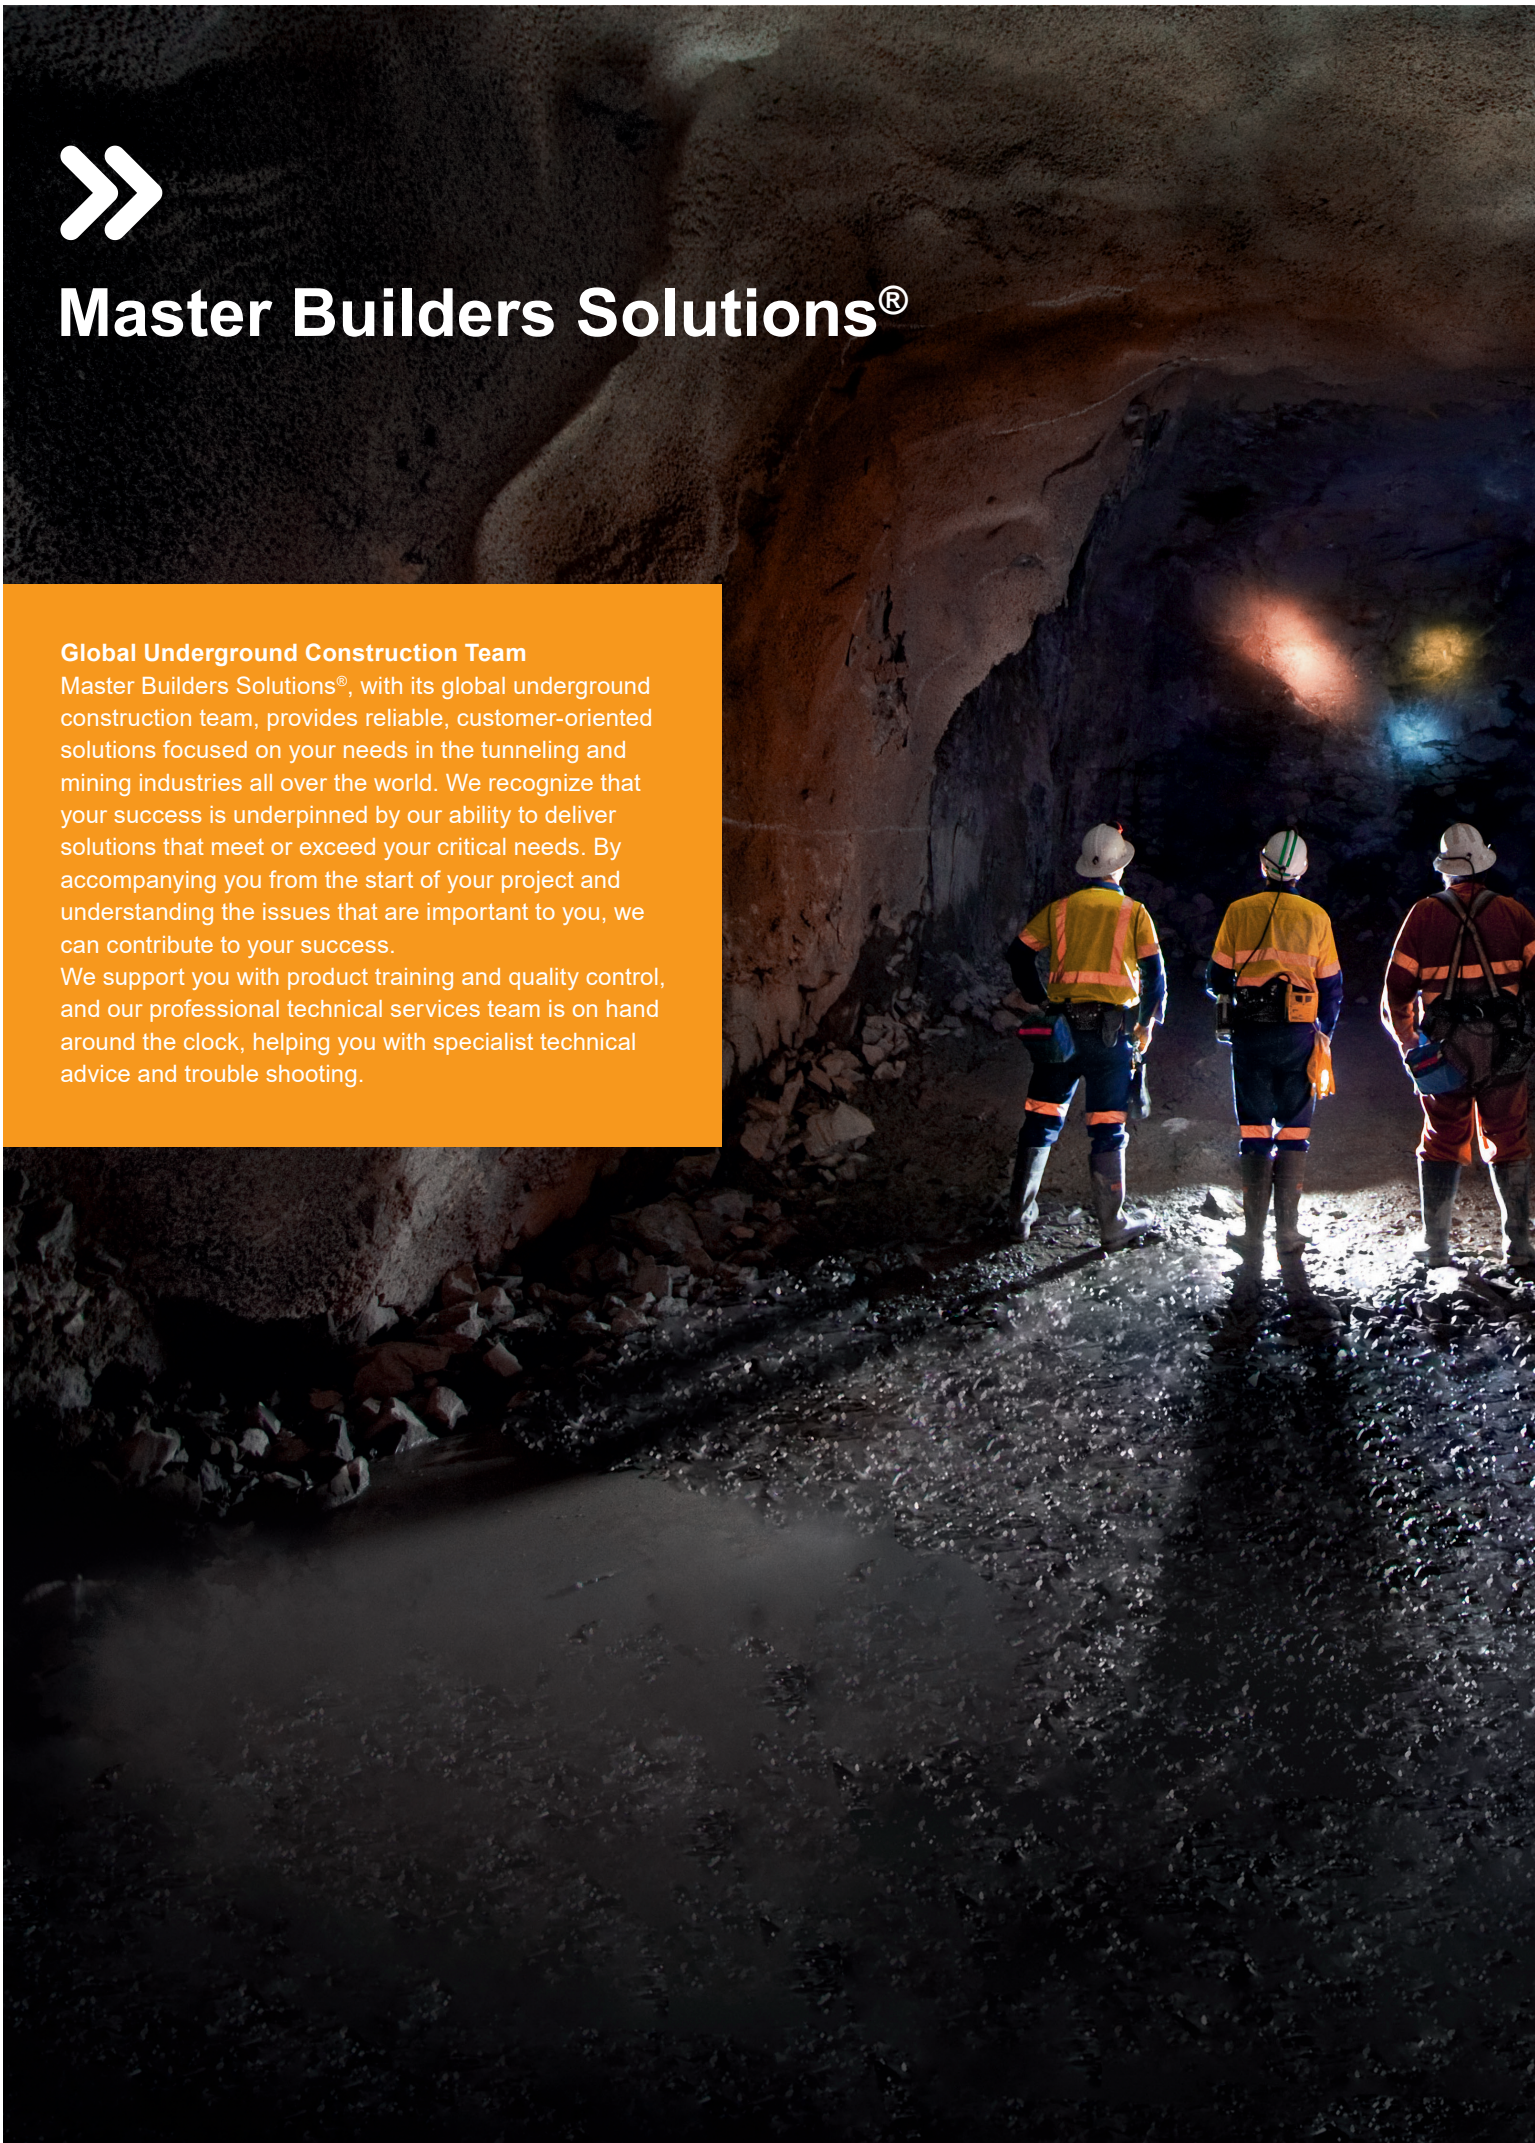



The Master Builders Solutions® brand brings all of our expertise together to create chemical solutions that inspire people to build better. Master Builders Solutions® is built on the experience gained from more than a century in the construction industry. The know-how and experience of a global community of construction experts form the core of Master Builders Solutions®.

We combine the right elements from our portfolio to solve your specific construction challenges. We collaborate across areas of expertise and regions and draw on the experience gained from countless construction projects worldwide. We leverage global technologies, as well as our in-depth knowledge of local building needs, to develop innovations that help make you more successful and drive sustainable construction.

The comprehensive portfolio under the Master Builders Solutions® brand encompasses concrete admixtures, cement additives, solutions for underground construction, and waterproofing solutions.

Our comprehensive portfolio

- Concrete admixtures
- Cement additives
- Chemical solutions for underground construction



Master Builders Solutions® for the Construction Industry

MasterAir®

Complete solutions for air entrained concrete

MasterCast®

Solutions for the manufactured concrete product industry

MasterCem®

Solutions for cement manufacture

MasterCO₂re™

Solutions for low-clinker concrete

MasterEase®

Low viscosity for high performance concrete

MasterFinish®

Solutions for formwork treatment and surface improvement

MasterFiber®

Comprehensive solutions for fiber reinforced concrete

MasterGlenium®

Solutions for high performance concrete

MasterKure®

Solutions for concrete curing

MasterLife®

Solutions for enhanced durability

MasterMatrix®

Advanced rheology control for concrete

MasterPel®

Solutions for hydrophobization, anti-efflorescence and surface protection

MasterPolyheed®

Solutions for mid-range concrete

MasterPozzolith®

Solutions for water-reduced concrete

MasterRheobuild®

Solutions for high strength concrete

MasterRoc®

Solutions for underground construction

MasterSet®

Solutions for set control

MasterSphere®

Solutions for guaranteed freeze-thaw resistance

MasterSuna®

Solutions for sand and gravel in concrete

MasterSure®

Solutions for extraordinary workability retention

Master X-Seed®


Advanced accelerator solutions for concrete



QUANTIFIED SUSTAINABLE BENEFITS ADVANCED CHEMISTRY BY MASTER BUILDERS SOLUTIONS

Let the numbers do the talking: We have portrayed some of our most eco-efficient product solutions for concrete and precast production, construction, and civil engineering.

sustainability.master-builders-solutions.com



**Master Builders Solutions
Deutschland GmbH**
Glücksteinallee 43-45
68163 Mannheim, Germany
ugc@masterbuilders.com

**Master Builders Solutions
Admixture Systems US, LLC**
23700 Chagrin Blvd
Beachwood, OH 44122, USA
P +1-216-839-7500
admixtures@masterbuilders.com

The data contained in this publication are based on our current knowledge and experience. They do not constitute the agreed contractual quality of the product and, in view of the many factors that may affect processing and application of our products, do not relieve processors from carrying out their own investigations and tests. The agreed contractual quality of the product at the time of transfer of risk is based solely on the data in the specification data sheet. Any descriptions, drawings, photographs, data, proportions, weights, etc. given in this publication may change without prior information. It is the responsibility of the recipient of our product to ensure that any proprietary rights and existing laws and legislation are observed (07/2023).

© registered trademark of Master Builders Solutions in many countries of the world

MBS-08-2021-UGC-0097-EN